

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 December 2004 (29.12.2004)


PCT

(10) International Publication Number  
**WO 2004/113638 A1**

- (51) International Patent Classification<sup>7</sup>: **E04C 5/07**, B29C 53/56, 53/80, 70/32
- (21) International Application Number: PCT/NO2004/000185
- (22) International Filing Date: 23 June 2004 (23.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20032874 23 June 2003 (23.06.2003) NO
- (71) Applicant (for all designated States except US): AS SPILKA INDUSTRI [NO/NO]; Emblem, N-6013 Ålesund (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): STAFSET, Kåre [NO/NO]; Blindheimsbreivika, N-6010 Ålesund (NO).
- (74) Agent: AS BERGEN PATENTKONTOR; Strandgt. 198, P.O. Box 1998, Nordnes, N-5817 Bergen (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR PRODUCTION OF A REINFORCEMENT BAR

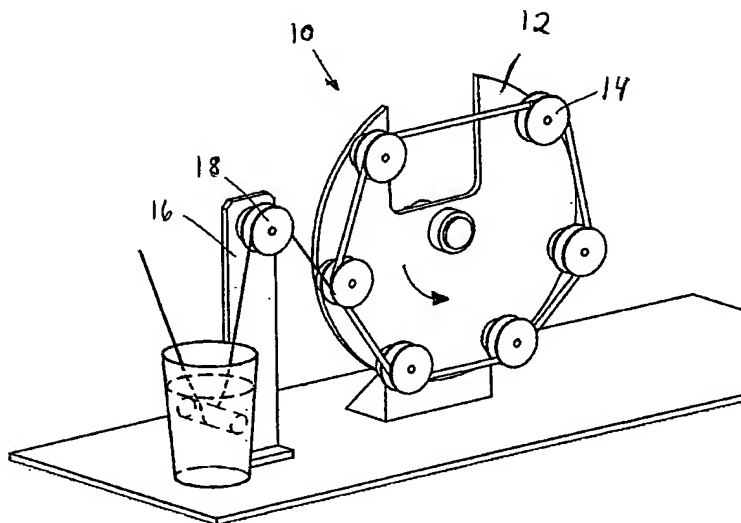

(57) Abstract: A method for fabrication of a bent reinforcing rod in a composite material is described, where the reinforcing rod is composed of longitudinal fibres and a sheathing layer of fibres or foil, comprising the steps: to moisten fibre thread with a binding agent, to reel the moistened fibre thread to a bundle with a closed, approximately circular shape, consisting of a layer of longitudinal, parallel fibres of a desired thickness, whereby all the fibres in the layer obtain an approximately equal axial tightening, and to envelope an outer layer of fibre threads, and/or foil, or other suitable material, around the layer of longitudinal fibres, and that the fabricated blank is given a final form in a second forming process. The invention also relates to a device (10) for carrying out the method.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*